The Fujitsu logo, featuring the word "FUJITSU" in a bold, white, sans-serif font with a stylized infinity symbol above the letter 'J'.

FUJITSU

AUSTRALIA'S FAVOURITE AIR®

The words "MULTI SYSTEM" are written in a large, white, sans-serif font, centered over a purple rectangular background. A large indoor plant is visible behind the text.

MULTI  
SYSTEM

The words "AIR CONDITIONING SOLUTIONS" are written in a smaller, white, sans-serif font, centered over the purple background. Two horizontal white lines are positioned above and below the text.

AIR CONDITIONING  
SOLUTIONS

A photograph of a family of four sitting on a grey sofa in a bright, modern living room. A man and a woman are smiling, and a young child is sitting between them. A woman is reading a blue book to a young girl. A large indoor plant is in the background.

ENERGY EFFICIENT | FLEXIBLE INSTALLATION | INNOVATIVE TECHNOLOGY  
BACKED BY A 5 YEAR FULL PARTS & LABOUR WARRANTY

# WHY CHOOSE FUJITSU?

## AUSTRALIA'S FAVOURITE AIR®

Fujitsu General is a leading supplier of air conditioners in Australia, with a portfolio to suit both residential and commercial applications.

We focus all of our research and manufacturing strengths into air conditioners which has resulted in the extensive range of world-class and energy efficient air conditioners.

Fujitsu General strives to consistently provide high quality, reliable products accompanied by superior customer service. To be 'Australia's Favourite Air®' means to be the best air conditioning company to deal with in Australia, not just a leading air conditioning brand.

That's why we're proud to say we are 'Australia's Favourite Air®'.

## PEACE OF MIND

Fujitsu believe in the quality and reliability of every air conditioner we sell. This is why we're happy to provide a 5 year parts and labour warranty across the entire domestic range.



## FUJITSU CHANNEL PARTNER NETWORK

Fujitsu have a comprehensive network of retailers and dealers right across Australia. This ensures that there is a local stockist in your area to assist you in purchasing a Fujitsu air conditioning system for your home.

## VOTED BY AUSTRALIANS 'MOST TRUSTED BRAND - AIR CONDITIONING CATEGORY 2018 & 2019'

Fujitsu is honoured to be voted Reader's Digest Most Trusted Brand in the Air Conditioning category 2 Years Running.

We understand that our customers are investing in our brand and trusting that we will provide their family with a comfortable living environment all year round.



## EXCEPTIONAL AFTER SALES SERVICE

At Fujitsu, we pride ourselves on providing exceptional customer service. Fujitsu General Assist is our in-house customer care and technical support department which was implemented to deliver a high level of support and accessibility to our customers.



Fujitsu General Assist deploys factory trained technicians in Sydney, Melbourne, Brisbane, Adelaide and Perth and provides access to dedicated Service Agents in all other parts of Australia. These technicians are well equipped with the necessary tools and spare parts to enable them to resolve issues onsite, promptly. This offers customers a high first time fix rate and seamless experience.



# MULTI SYSTEMS

## WHAT ARE MULTI SYSTEMS?

Multi System air conditioning is ideal where individual air conditioning units are required in more than one room, for example one for the bedroom and one for the living area.

A Fujitsu Multi System allows for a variety of up to six individual indoor air conditioning systems to be connected to just one compact outdoor unit.

Each individual air conditioning system can be controlled separately using an individual remote.

Multi Systems can be installed in a variety of applications from homes and offices to multi story buildings.




## WIDE RANGE OF OPTIONS

The Fujitsu range includes 7 different indoor types and 14 different models ranging in capacity class from 2.0kW to 7.0kW. With such a wide range of options to choose from, there's a combination to suit almost any application.

## FLEXIBLE INSTALLATION

Multiple indoor units can be connected to one outdoor unit rather than multiple outdoor units. This means greater installation flexibility and space saving options. Long pipe runs offer even greater choices for installation.

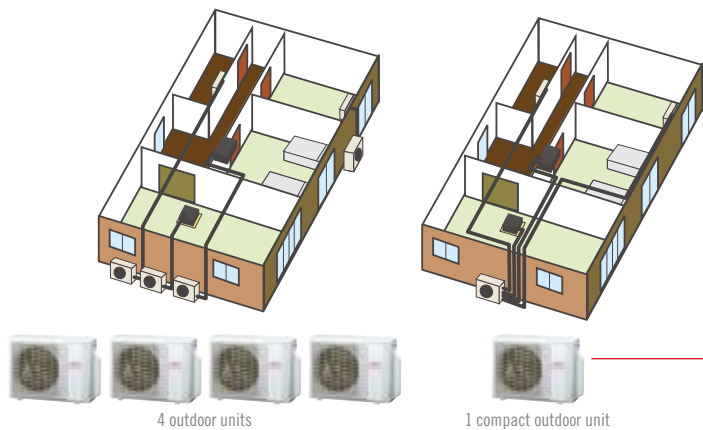



# MULTI SYSTEMS

## THE 5 AND 6 ROOM MULTI SYSTEMS

The Fujitsu General 5 and 6 room Multi Systems are easy and efficient to install whilst offering more flexibility to accommodate the diversity of modern home design. With just one unit installed outside, the 10kW unit has the capacity to cover two to five rooms, and the 12.5kW outdoor unit can have up to six indoor units connected.




Central Controller (optional)

- Operation is simple with the optional large backlit LCD central controller
- The four-way navigation pad enables control of the indoor units individually or simultaneously
- Each unit can be monitored, and features such as economy mode, remote control prohibition or low noise mode settings can be activated from one central point


## EASY INSTALLATION

Fitting the new systems has been made easier - a centralised valve allows vacuuming to be performed from one location. This reduces installation time on systems as previously the evacuation process had to be performed up to four times. Installation has been made simpler with the pipe connection location optimised, and a commissioning mode is inbuilt for automatic wiring and piping checks from the outdoor unit.


### 4 Rooms Multi System

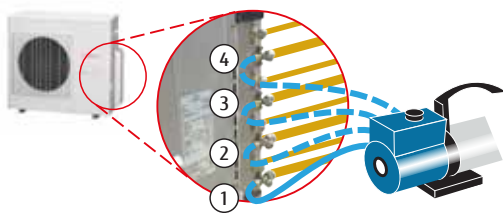

### 5-6 Rooms Multi System

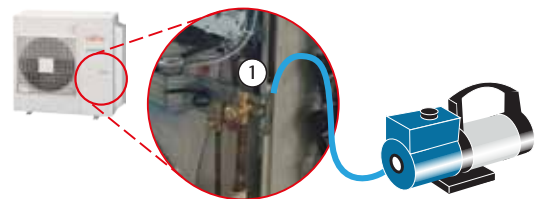


Automatic wiring and piping check

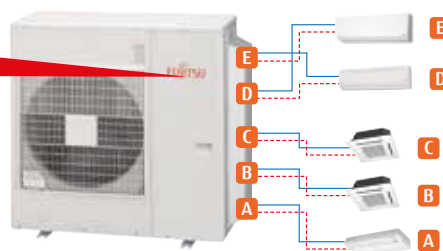

Automatic connection error repair

— : Wiring line  
 - - - : Piping line

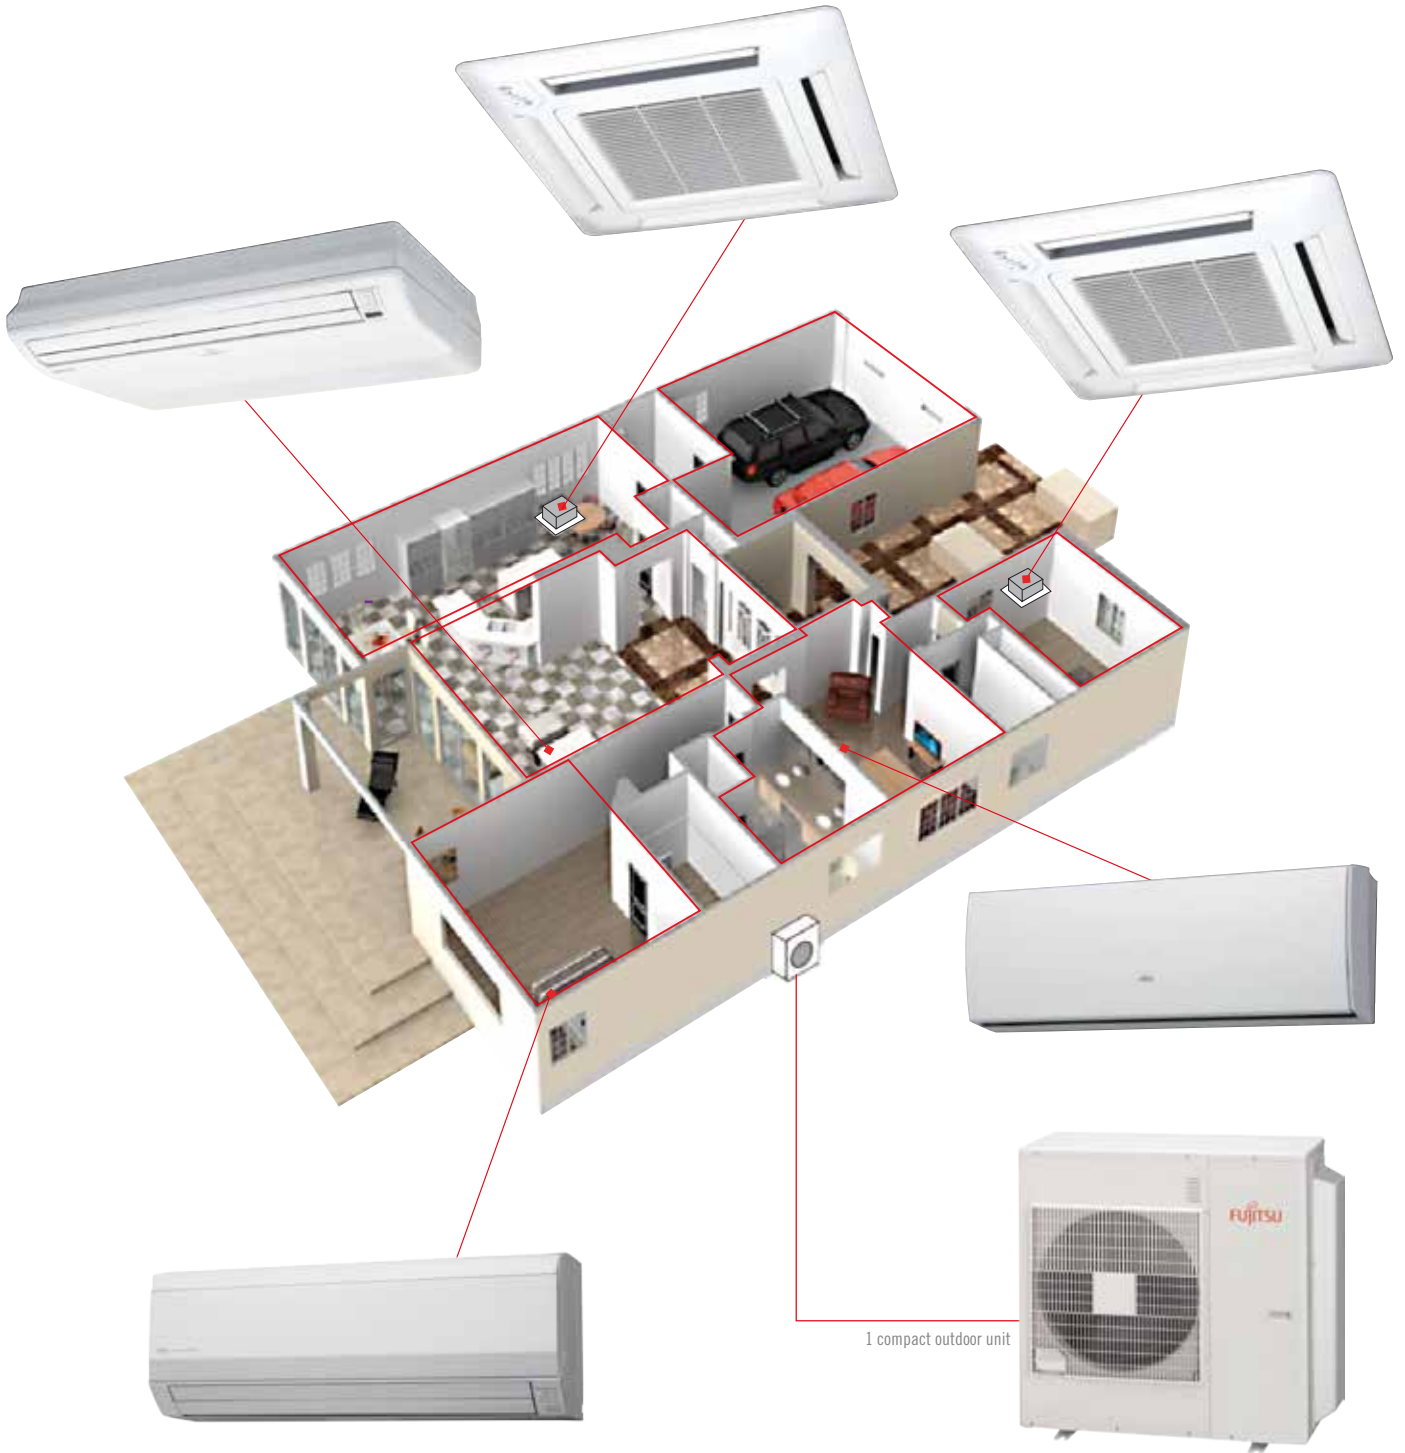

# INDOOR UNITS

## WALL MOUNTED - COMPACT CLASSIC

ASTG07/09/12LVCC

Available in three capacity sizes, this range of compact wall mounted indoor units are suitable for small and medium size bedrooms.



## WALL MOUNTED - CLASSIC

ASTG18LFCA  
ASTG24LFCC

These large capacity indoor units are suitable for living areas.



## WALL MOUNTED - DESIGNER

ASTG09/14LUCB

Designed for small bedrooms, the Designer range of wall mounted indoor units are discreet and have a sleek modern finish to suit most decors.



## FLOOR AND CEILING CONSOLE

ABTG18LVTA

Suitable for floor or ceiling installation, this model is designed for a medium to large living area.



## COMPACT CASSETTE

AUTG09/12LVLB  
AUTG18LVLA

These compact cassette models have a 3\* way or 4 way air flow direction option. Designed for commercial spaces, these units are suitable for meeting rooms.



## SLIM DUCT

ARTG09/12LLL B  
ARTG18LLTA

With 11 static pressure modes and a built in drain pump, these units are a great solution for a single room ducted system.




\*Requires an optional part: UTR-YDZB




# OUTDOOR UNITS

## 3 ROOM SET-UP

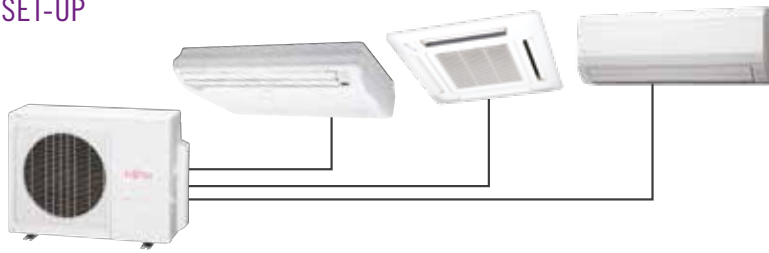


AOTG24LAT3 C 6.80kW / 23,200 BTU/h H 8.00kW / 27,300 BTU/h

## 4 ROOM SET-UP

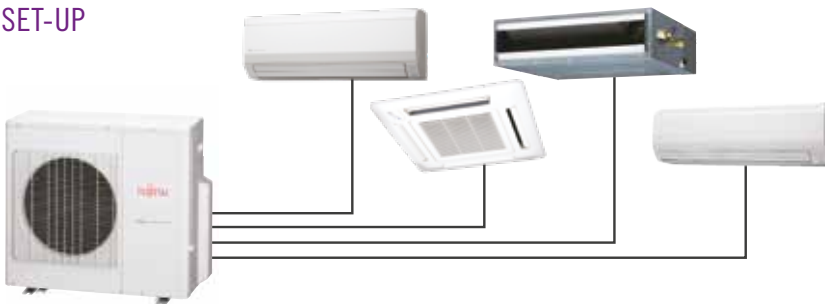

AOTG30LBT4 C 8.00kW / 27,300 BTU/h H 9.60kW / 32,800 BTU/h

## 5 ROOM SET-UP

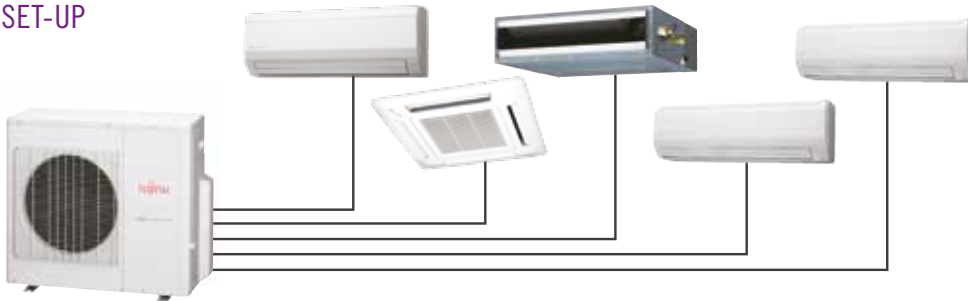

AOTG36LBA5 C 10.00kW / 34,100 BTU/h H 12.00kW / 41,000 BTU/h

## 6 ROOM SET-UP



AOTG45LBA6 C 12.50kW / 42,700 BTU/h H 13.50kW / 46,100 BTU/h

# FEATURES\*

## COMFORT FUNCTIONS



### POWERFUL MODE

This mode will operate the air conditioner at maximum capacity for 20 minutes, providing comfort faster than ever before.



### AUTOMATIC FAN SPEED

The micro processor automatically adjusts the airflow effectively to follow the changes of room temperature.



### DOUBLE SWING AUTOMATIC

Complex swing action of the louvres enables the unit to swing automatically both horizontal and vertical directions.



### 10° C HEAT OPERATION

The room temperature can be set to go no lower than 10°C, ensuring that the room does not get too cold when not occupied.



### RIGHT / LEFT SWING LOUVRE

The right / left louvre automatically swings in either direction.



### AUTOMATIC LOUVRE

The position of the louvres is set automatically to match the operating mode. It is also possible to adjust the louvres using the remote control.



### AUTO SHUT LOUVRE

The auto shut louvres close or open automatically when the unit stops or starts.



### AUTO-CHANGEOVER

The unit automatically switches between heating and cooling modes based on the temperature setting and room temperature.



### POWER DIFFUSER

An additional louvre that opens based on monitoring sensors to quickly enhance immediate comfort needs.



### CONNECTABLE FRESH AIR DUCT

Allows introduction of fresh air to occupied space.



### CONNECTABLE DISTRIBUTING DUCT

Systems are capable of attaching field-supplied branch ducts distributing the airflow.



### UP / DOWN SWING LOUVRE

The up / down louvre automatically swings up and down.



### AUTO RESTART

In the event of a temporary power failure, the unit will automatically restart in the same operating mode as before, once power supply is restored



### FRESH AIR INTAKE

Fresh air can be taken in by a fan which can be connected using an external control unit.

## CONVENIENCE FUNCTIONS



### SLEEP TIMER

The micro-processor gradually changes the room temperature, allowing you to sleep comfortably at night.



### PROGRAM TIMER

ON, OFF can be set up to 4 times in 1 day and up to 28 times in 1 week.



### WEEKLY TIMER

Different ON-OFF times can be set for up to 7 days.



### WEEKLY + SETBACK TIMER

Weekly + Setback timer can set temperature for two time spans and for each day of the week.



### FILTER SIGN

Select appropriate intervals for displaying the filter sign on the indoor unit according to the estimated amount of dust in the air of the room.



### ON-OFF TIMER

ON-OFF timer can be set to operate once every 24 hours.



### LOW NOISE MODE

The compressor speed and the outdoor unit fan speed are limited to reduce the operational noise.



### SUPER QUIET MODE

The indoor units fan can operate at a low speed to produce quieter operation.

\*Note: not all features available on all models, please refer to features checklist on page 12.



## ENERGY EFFICIENT FUNCTIONS



### HUMAN SENSOR

The human sensor detects movement so that when occupants leave the room, the air conditioner switches into energy saving mode after 20 minutes should no movement be detected. When occupants re-enter the room, it returns to normal operation.



### V-PAM

V-PAM inverter technology increases the maximum output of the compressor significantly and enables high power and high efficiency.



### i-PAM

i-PAM inverter technology enables high output and high efficiency performance.



### DEMAND RESPONSE

This product is designed to be compatible with Air Conditioning Demand Response program. When your electricity supplier activates one of the three modes, the air conditioner switches over to the appropriate operation.



### ECONOMY MODE

The economy operation will save energy in heating, cooling and dry mode. Economy operation is set by pressing the button on the remote control.

## CLEAN FUNCTIONS



### LONG-LIFE ION DEODORISATION FILTER

The filter deodorises by powerfully decomposing absorbed odours using the oxidising and reducing effects of ion generated by the ultra-fine-particle ceramic.



### WASHABLE PANEL

Dust which accumulates on the air conditioner can be easily cleaned with a damp cloth.



### APPLE-CATECHIN FILTER

Fine dust, invisible mould spores and harmful microorganisms are absorbed onto the filter by static electricity and further growth is inhibited and deactivated by the polyphenol ingredient extracted from apples.



# FEATURES CHECKLIST

FEATURES	ASTG09/14LUCB	ASTG07/09/12LVCC	ASTG18LFCA ASTG24LFCC	ABTG18LVTA	AUTG09/12LVLB AUTG18LVLA	ARTG09/12LLLB ARTG18LLTA
<b>COMFORT FUNCTIONS</b>						
Powerful Mode	✓	-	-	-	-	-
Automatic Fan Speed	✓	✓	✓	✓	✓	✓
Double Swing Automatic	-	-	✓	✓	-	-
10°C HEAT Operation	✓	✓	✓	✓	✓	#
Right / Left Swing Louvre	-	-	✓	✓	-	-
Automatic Louvre	✓	✓	✓	✓	-	*
Auto Shut Louvre	✓	✓	✓	-	-	*
Auto Changeover	✓	✓	✓	✓	✓	✓
Power Diffuser	✓	✓	✓	✓	-	-
Connectable Fresh Air Duct	-	-	-	-	✓	-
Connectable Distributing Duct	✓	-	-	-	-	✓
Up / Down Swing Louvres	✓	✓	✓	✓	✓	*
Auto Restart	✓	✓	✓	✓	✓	✓
Fresh Air Intake	-	-	-	-	✓	-
<b>CONVENIENCE FUNCTIONS</b>						
Sleep Timer	✓	✓	✓	✓	✓	✓
Program Timer	✓	✓	✓	✓	✓	✓
Weekly Timer	✓	o	o	o	o	✓
Weekly + Setback Timer	o	o	o	o	o	✓
Filter Sign	✓	✓	✓	✓	✓	✓
On-Off Timer	✓	✓	✓	✓	✓	✓
Low Noise Mode	✓	-	-	-	-	-
Super Quiet Mode	✓	✓	✓	✓	✓	✓
<b>ENERGY EFFICIENT FUNCTIONS</b>						
Human Sensor	✓	-	-	-	-	-
i-PAM / V-PAM Control	✓	✓	✓	✓	✓	✓
Demand Response	^	^	^	^	^	^
Economy Mode	✓	✓	✓	✓	✓	✓
<b>CLEAN FUNCTIONS</b>						
Long-life Ion Deodorisation Filter	✓	✓	✓	-	-	-
Washable Panel	✓	✓	✓	✓	✓	✓
Apple-Catechin Filter	✓	✓	✓	-	-	-

o Optional feature when using a wired controller and communication kit where applicable. # Available when using a wireless remote only.

\* Available when optional auto louvre grille kit is purchased. ^ Applicable for AOTG36LBLA5 and AOTG45LBLA6 outdoor units only.

## SPECIFICATIONS & FEATURES

Products in this brochure contain R410A refrigerant. Please refer to specifications before installation and servicing this product. Only persons and / or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so. The purchaser must ensure that the person and / or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required. Future improvements, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

**ALL CAPACITY AND ENERGY EFFICIENCY RATINGS ARE BASED ON AS / NZS3823.2.**

<b>COOLING</b>	Indoor temperature	27°C DB / 19°C WB
	Outdoor temperature	35°C DB
<b>HEATING</b>	Indoor temperature	20°C DB
	Outdoor temperature	7°C DB / 6°C WB

Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions.

# CONTROLLER OPTIONS

## WIRED REMOTE CONTROLLER



UTY-RVNYN



UTY-RNNYN

## WIRELESS REMOTE CONTROLLER



AR-RAH2E



AR-RAH1E



AR-REA1E

## GROUP CONTROLLER



UTY-DMMYM

## IR RECEIVER UNIT



UTY-LRHYM



## SIMPLE REMOTE CONTROLLER



UTY-RSNYN

## LINE UP

TYPE	MODEL	INDOOR UNITS					
		COMPACT CASSETTE	SLIM DUCT	WALL MOUNTED			FLOOR/CEILING
				LVCC	LUCB	LFCC	
WIRED REMOTE CONTROLLER	UTY-RNNYN	○	A	○* <sup>1</sup>	○* <sup>1</sup>	○	○
	UTY-RVNYN	○	○	○* <sup>1</sup>	○* <sup>1</sup>	○	○
GROUP CONTROLLER	UTY-DMMYM	○* <sup>2</sup>	○* <sup>2</sup>	○* <sup>2</sup>	○* <sup>2</sup>	○* <sup>2</sup>	○* <sup>2</sup>
WIRELESS REMOTE CONTROLLER	AR-RAH2E	-	-	A	-	A	A
	AR-RAH1E	A	-	-	-	-	-
	AR-REA1E	-	-	-	A	-	-
IR RECEIVER UNIT	UTY-LRHYM	-	○	-	-	-	-
SIMPLE REMOTE CONTROLLER	UTY-RSNYN	○	○	○* <sup>1</sup>	○* <sup>1</sup>	○	○

A Standard Accessory ○ Optional – Not applicable ○\*<sup>1</sup> Optional Communication Kit is necessary for the installation  
 ○\*<sup>2</sup> Optional when used with 5 and 6 head multi outdoor systems

# CONTROLLER FEATURES

These wireless remote controllers are easy to use with simple function settings and a variety of built in timers, energy saving options and a super quiet option.

## AR-RAH2E / AR-RAH1E

### FEATURES:

- 4 Timer modes available (ON / OFF / PROGRAM / SLEEP)
- Easy operation



## AR-REA1E

### FEATURES:

- 5 Timer modes available (ON / OFF / PROGRAM / SLEEP / WEEKLY)
- Easy operation



There are three available options of wired controllers to suit every application required. Easy and simple to use, they help to ensure you get the most out of your air conditioning system.

## UTY-RVNYN

### FEATURES:

- Backlit controller
- 4 Timer modes available (ON / OFF / WEEKLY / AUTO OFF)
- Set temperature range limitation
- Large easy to press keys
- Built in thermosensor



## UTY-RNNYN

### FEATURES:

- 3 Timer modes available (ON / OFF / WEEKLY AND SETBACK)
- Built in thermosensor



## UTY-RSNNY

### FEATURES:

- Backlit controller
- No timer options
- Easy to use



## UTY-DMMYM (EXCLUSIVE TO 5 AND 6 MULTI SYSTEMS)

### FEATURES:

- Control and monitor up to 6 units individually or simultaneously
- Remote control prohibition
- 2 weekly timer schedules with 4 daily commands
- Economy and low noise modes





# PRODUCT SPECIFICATIONS

## WALL MOUNTED - DESIGNER RANGE

MODEL NUMBER		INDOOR UNIT		kW	ASTG09LUCB	ASTG14LUCB
kW Class				kW	2.5kW Class	4.0kW Class
Power Source				V/PH/HZ	240 / 1 / 50	240 / 1 / 50
Sound Pressure Level	Cool	H/M/L/Q	dBA		36 / 32 / 28 / 21	41 / 36 / 33 / 25
	Heat				36 / 32 / 28 / 21	41 / 36 / 34 / 27
Airflow	Cool	H/M/L/Q	l/sec		167 / 153 / 131 / 92	197 / 178 / 158 / 108
	Heat				167 / 153 / 131 / 92	197 / 178 / 164 / 119
Net Dimensions		H x W x D		mm	282 x 870 x 185	282 x 870 x 185
Weight				kg	9.5	9.5
Pipe Size		Liquid / Gas		mm	6.35 / 9.52	6.35 / 12.7



## WALL MOUNTED - COMPACT CLASSIC

MODEL NUMBER		INDOOR UNIT		kW	ASTG07LVCC	ASTG09LVCC	ASTG12LVCC
kW Class				kW	2.0kW Class	2.5kW Class	3.5kW Class
Power Source				V/PH/HZ	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50
Sound Pressure Level	Cool	H/M/L/Q	dBA		36 / 33 / 29 / 23	36 / 33 / 29 / 23	38 / 35 / 31 / 23
	Heat				36 / 33 / 32 / 22	36 / 33 / 32 / 23	38 / 35 / 33 / 24
Airflow	Cool	H/M/L/Q	l/sec		178 / 156 / 128 / 100	178 / 156 / 128 / 100	194 / 175 / 139 / 100
	Heat				178 / 161 / 150 / 100	178 / 161 / 150 / 106	194 / 175 / 161 / 111
Net Dimensions		H x W x D		mm	293 x 790 x 225	293 x 790 x 225	293 x 790 x 225
Weight				kg	9.5	9.5	9.5
Pipe Size		Liquid / Gas		mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52



## WALL MOUNTED - CLASSIC

MODEL NUMBER		INDOOR UNIT		kW	ASTG18LFCA	ASTG24LFCC
kW Class				kW	5.0kW Class	7.0kW Class
Power Source				V/PH/HZ	240 / 1 / 50	240 / 1 / 50
Sound Pressure Level	Cool	H/M/L/Q	dBA		43 / 37 / 33 / 26	49 / 42 / 37 / 33
	Heat				42 / 37 / 33 / 25	48 / 42 / 37 / 33
Airflow	Cool	H/M/L/Q	l/sec		250 / 206 / 172 / 153	311 / 250 / 206 / 172
	Heat				250 / 206 / 172 / 153	306 / 250 / 206 / 172
Net Dimensions		H x W x D		mm	320 x 998 x 238	320 x 998 x 238
Weight				kg	14	14
Pipe Size		Liquid / Gas		mm	6.35 / 12.7	6.35 / 15.88





# PRODUCT SPECIFICATIONS

## FLOOR AND CEILING CONSOLE

MODEL NUMBER		INDOOR UNIT		ABTG18LVTA	
kW Class				5.0kW Class	
Power Source				V/PH/HZ	
Sound Pressure Level	Cool	H/M/L/Q	dBA	UC - 41 / 38 / 34 / 32	
	Heat			UC - 41 / 38 / 34 / 32	
	Cool	H/M/L/Q	dBA	FC - 44 / 41 / 37 / 35	
	Heat			FC - 44 / 41 / 37 / 35	
Airflow	Cool	H/M/L/Q	l/sec	217 / 194 / 156 / 139	
	Heat			217 / 194 / 156 / 139	
Net Dimensions		H x W x D		mm	
				199 x 990 x 655	
Weight				kg	
				27	
Pipe Size		Liquid / Gas		mm	
				6.35 / 12.7	



## COMPACT CASSETTE

MODEL NUMBER		INDOOR UNIT		AUTG09LLVB	AUTG12LLVB	AUTG18LVLA			
kW Class				2.5kW Class		3.5kW Class		5.0kW Class	
Power Source				V/PH/HZ		240 / 1 / 50		240 / 1 / 50	
Sound Pressure Level	Cool	H/M/L/Q	dBA	33 / 31 / 29 / 27		37 / 33 / 31 / 28		42 / 37 / 33 / 29	
	Heat			34 / 32 / 29 / 27		37 / 33 / 31 / 28		44 / 40 / 37 / 30	
Airflow	Cool	H/M/L/Q	l/sec	150 / 136 / 122 / 108		169 / 147 / 131 / 114		208 / 169 / 144 / 114	
	Heat			150 / 136 / 122 / 108		169 / 147 / 131 / 114		222 / 197 / 167 / 125	
Grille Model Number				UTG-UFYD-W		UTG-UFYD-W		UTG-UFYD-W	
Net Dimensions - Indoor		H x W x D		mm		245 x 570 x 570		245 x 570 x 570	
Weight - Indoor				kg		15		15	
Net Dimensions - Grille		H x W x D		mm		49 x 700 x 700		49 x 700 x 700	
Weight - Grille				kg		2.6		2.6	
Pipe Size		Liquid / Gas		mm		6.35 / 9.52		6.35 / 9.52	
						6.35 / 9.52		6.35 / 12.7	



## SLIM DUCT

MODEL NUMBER		INDOOR UNIT		ARTG09LLLB	ARTG12LLLB	ARTG18LLTA			
kW Class				2.5kW Class		3.5kW Class		5.0kW Class	
Power Source				V/PH/HZ		240 / 1 / 50		240 / 1 / 50	
Sound Pressure Level	Cool	H/M/L/Q	dBA	28 / 27 / 26 / 25		29 / 28 / 27 / 26		32 / 31 / 30 / 29	
	Heat			28 / 26 / 25 / 24		29 / 28 / 27 / 24		33 / 32 / 31 / 29	
Airflow	Cool	H/M/L/Q	l/sec	167 / 153 / 139 / 125		181 / 167 / 153 / 133		261 / 244 / 228 / 208	
	Heat			167 / 153 / 139 / 125		181 / 167 / 153 / 133		261 / 244 / 228 / 208	
Static Pressure Range				Pa		0 to 90		0 to 90	
Net Dimensions		H x W x D		mm		198 x 700 x 620		198 x 700 x 620	
Weight				kg		19		19	
Pipe Size		Liquid / Gas		mm		6.35 / 9.52		6.35 / 9.52	
						6.35 / 9.52		6.35 / 12.7	



# PRODUCT SPECIFICATIONS

## OUTDOOR SPECIFICATIONS

MODEL NUMBER			AOTG24LAT3	AOTG30LBTA4	AOTG36LBLA5	AOTG45LBLA6		
Cooling Capacity	Rated		kW	6.80	8.00	10.00	12.50	
	Range		kW	1.80 - 8.50	3.50 - 10.10	3.50 - 12.50	3.50 - 14.00	
Heating Capacity	Rated		kW	8.00	9.60	12.00	13.50	
	Range		kW	2.00 - 9.20	3.70 - 12.00	3.50 - 14.00	3.50 - 16.00	
Power Supply			V / Ph / HZ	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50	240 / 1 / 50	
Input	Cooling	Rated	kW	1.94	2.22	2.44	3.57	
		Max	kW	2.60	3.56	4.04	5.02	
	Heating	Rated	kW	2.00	2.40	2.79	3.37	
		Max	kW	2.87	3.58	3.98	4.59	
Running Current	Cooling	Rated	amps	8.10	9.30	10.30	15.00	
		Max	amps	12.50	15.70	20.60	23.90	
	Heating	Rated	amps	8.40	10.10	11.80	14.20	
		Max	amps	12.50	15.70	20.60	23.90	
Energy Efficiency			EER	3.50	3.60	4.10	3.50	
			AEER	3.448	3.527	4.156	3.487	
			COP	4.00	4.00	4.30	4.00	
			ACOP	3.992	3.967	4.370	3.996	
Compressor				DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	
Outdoor Sound Pressure Level	Cooling		dBA	48	50	52	52	
	Heating		dBA	49	51	54	54	
Outdoor Sound Power Level				dBA	64	64	68	68
Dimensions			H x W x D	mm	700 x 900 x 330	830 x 900 x 330	998 x 970 x 370	998 x 970 x 370
Weight				kg	55	68	94	94
Connection Pipe Sizes	Unit A	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7	
	Unit B	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7	
	Unit C	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	
	Unit D	Liquid / Gas	mm	-	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	
	Unit E	Liquid / Gas	mm	-	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	
	Unit F	Liquid / Gas	mm	-	-	-	6.35 / 9.52	
Precharged Pipe Length			m	30	30	50	50	
Minimum Pipe Length per indoor			m	5	5	5	5	
Minimum Pipe Length - Total			m	15	10	15	15	
Maximum Pipe Length per Indoor			m	25	25	25	25	
Maximum Pipe Length - Total			m	50	70	80	80	
Maximum Piping Height - Between Indoors			m	10	10	10	10	
Maximum Piping Height - Between Outdoor unit and each Indoor			m	15	15	15	15	
Pipe Connection Methods				Flare	Flare	Flare	Flare	
Outdoor operating temperature	Cooling		°CDB	-10 to 46	0 to 46	-10 to 46	-10 to 46	
	Heating		°CDB	-15 to 24	-10 to 24	-15 to 24	-15 to 24	
Refrigerant				R410A	R410A	R410A	R410A	

# CONNECTION CHARTS

**AOTG24LAT3 (2-3 ROOMS)**

NO.	ROOMS	ROOM 1	ROOM 2	ROOM 3	TOTAL
1	2	7	7	—	14
2		7	9	—	16
3		7	12	—	19
4		7	14	—	21
5		7	18	—	25
6		9	9	—	18
7		9	12	—	21
8		9	14	—	23
9		9	18	—	27
10		12	12	—	24
11		12	14	—	26
12		12	18	—	30
13	3	7	7	7	21
14		7	7	9	23
15		7	7	12	26
16		7	7	14	28
17		7	9	9	25
18		7	9	12	28
19		7	9	14	30
20		7	12	12	31
21		7	12	14	33
22		9	9	9	27
23		9	9	12	30
24		9	9	14	32
25		9	12	12	33
26		9	12	14	35
27		12	12	12	36

**AOTG30LBTA4 (2-4 ROOMS)**

NO.	ROOMS	ROOM 1	ROOM 2	ROOM 3	ROOM 4	TOTAL
1	2	7	24	—	—	31
2		9	24	—	—	33
3		12	24	—	—	36
4		14	24	—	—	38
5		18	18	—	—	36
6		18	24	—	—	42
7		7	7	14	—	28
8		7	7	18	—	32
9		7	7	24	—	38
10		7	9	12	—	28
11		7	9	14	—	30
12		7	9	18	—	34
13		7	9	24	—	40
14		7	12	12	—	31
15		7	12	14	—	33
16		7	12	18	—	37
17		7	12	24	—	43
18	7	14	14	—	35	
19	7	14	18	—	39	
20	7	14	24	—	45	
21	7	18	18	—	43	
22	7	18	24	—	49	
23	3	9	9	9	—	27
24		9	9	12	—	30
25		9	9	14	—	32
26		9	9	18	—	36
27		9	9	24	—	42
28		9	12	12	—	33
29		9	12	18	—	39
30		9	12	24	—	45
31		9	14	14	—	37
32		9	14	18	—	41
33		9	14	24	—	47
34		9	18	18	—	45
35		12	12	12	—	36
36		12	12	14	—	38
37		12	12	18	—	42
38		12	12	24	—	48
39		12	14	14	—	40
40		12	14	18	—	44
41		12	18	18	—	48

NO.	ROOMS	ROOM 1	ROOM 2	ROOM 3	ROOM 4	TOTAL
42	4	7	7	7	7	28
43		7	7	7	9	30
44		7	7	7	12	33
45		7	7	7	14	35
46		7	7	7	18	39
47		7	7	9	9	32
48		7	7	9	12	35
49		7	7	9	14	37
50		7	7	9	18	41
51		7	7	12	12	38
52		7	7	12	14	40
53		7	7	12	18	44
54		7	7	14	14	42
55		7	9	9	9	34
56		7	9	9	12	37
57		7	9	9	14	39
58		7	9	9	18	43
59		7	9	12	12	40
60		7	9	12	14	42
61		7	9	12	18	46
62		7	9	14	14	44
63		7	12	12	12	43
64		7	12	12	14	45
65		7	12	12	18	49
66		7	12	14	14	47
67		9	9	9	9	36
68		9	9	9	12	39
69		9	9	9	14	41
70		9	9	9	18	45
71		9	9	12	12	42
72		9	9	12	14	44
73		9	9	12	18	48
74		9	9	14	14	46
75		9	12	12	12	45
76		9	12	12	14	47
77		9	12	14	14	49
78		12	12	12	12	48

# CONNECTION CHARTS

AOTG36LBLA5 (2-5 ROOMS)

NO.	ROOMS	ROOM 1	ROOM 2	ROOM 3	ROOM 4	ROOM 5	TOTAL
1	2	7	24	—	—	—	31
2		9	24	—	—	—	33
3		12	24	—	—	—	36
4		14	24	—	—	—	38
5		18	18	—	—	—	36
6		18	24	—	—	—	42
7		24	24	—	—	—	48
8	3	7	7	14	—	—	28
9		7	7	18	—	—	32
10		7	7	24	—	—	38
11		7	9	12	—	—	28
12		7	9	14	—	—	30
13		7	9	18	—	—	34
14		7	9	24	—	—	40
15		7	12	12	—	—	31
16		7	12	14	—	—	33
17		7	12	18	—	—	37
18		7	12	24	—	—	43
19		7	14	14	—	—	35
20		7	14	18	—	—	39
21		7	14	24	—	—	45
22		7	18	18	—	—	43
23		7	18	24	—	—	49
24		9	9	9	—	—	27
25		9	9	12	—	—	30
26		9	9	14	—	—	32
27		9	9	18	—	—	36
28		9	9	24	—	—	42
29		9	12	12	—	—	33
30		9	12	14	—	—	35
31		9	12	18	—	—	39
32	9	12	24	—	—	45	
33	9	14	14	—	—	37	
34	9	14	18	—	—	41	
35	9	14	24	—	—	47	
36	9	18	18	—	—	45	
37	9	18	24	—	—	51	
38	12	12	12	—	—	36	
39	12	12	14	—	—	38	
40	12	12	18	—	—	42	
41	12	12	24	—	—	48	
42	12	14	14	—	—	40	
43	12	14	18	—	—	44	
44	12	14	24	—	—	50	
45	12	18	18	—	—	48	
46	12	18	24	—	—	54	
47	14	14	14	—	—	42	
48	14	14	18	—	—	46	
49	14	14	24	—	—	52	
50	14	18	18	—	—	50	
51	18	18	18	—	—	54	

NO.	ROOMS	ROOM 1	ROOM 2	ROOM 3	ROOM 4	ROOM 5	TOTAL
52	4	7	7	7	7	—	28
53		7	7	7	9	—	30
54		7	7	7	12	—	33
55		7	7	7	14	—	35
56		7	7	7	18	—	39
57		7	7	7	24	—	45
58		7	7	9	9	—	32
59		7	7	9	12	—	35
60		7	7	9	14	—	37
61		7	7	9	18	—	41
62		7	7	9	24	—	47
63		7	7	12	12	—	38
64		7	7	12	14	—	40
65		7	7	12	18	—	44
66		7	7	12	24	—	50
67		7	7	14	14	—	42
68		7	7	14	18	—	46
69		7	7	14	24	—	52
70		7	7	18	18	—	50
71		7	9	9	9	—	34
72		7	9	9	12	—	37
73		7	9	9	14	—	39
74		7	9	9	18	—	43
75		7	9	9	24	—	49
76		7	9	12	12	—	40
77		7	9	12	14	—	42
78		7	9	12	18	—	46
79		7	9	12	24	—	52
80		7	9	14	18	—	48
81		7	9	14	24	—	54
82		7	9	18	18	—	52
83		7	12	12	12	—	43
84		7	12	12	14	—	45
85		7	12	12	18	—	49
86	7	12	14	14	—	47	
87	7	12	14	18	—	51	
88	7	14	14	14	—	49	
89	7	14	14	18	—	53	
90	9	9	9	9	—	36	
91	9	9	9	12	—	39	
92	9	9	9	14	—	41	
93	9	9	9	18	—	45	
94	9	9	9	24	—	51	
95	9	9	12	12	—	42	
96	9	9	12	14	—	44	
97	9	9	12	18	—	48	
98	9	9	12	24	—	54	
99	9	9	14	14	—	46	
100	9	9	14	18	—	50	
101	9	9	18	18	—	54	
102	9	12	12	12	—	45	
103	9	12	12	14	—	47	
104	9	12	12	18	—	51	
105	9	12	14	14	—	49	
106	9	12	14	18	—	53	
107	9	14	14	14	—	51	
108	12	12	12	12	—	48	
109	12	12	12	14	—	50	
110	12	12	12	18	—	54	
111	12	12	14	14	—	52	
112	12	14	14	14	—	54	

NO.	ROOMS	ROOM 1	ROOM 2	ROOM 3	ROOM 4	ROOM 5	TOTAL
113	5	7	7	7	7	7	35
114		7	7	7	7	9	37
115		7	7	7	7	12	40
116		7	7	7	7	14	42
117		7	7	7	7	18	46
118		7	7	7	7	24	52
119		7	7	7	9	9	39
120		7	7	7	9	12	42
121		7	7	7	9	14	44
122		7	7	7	9	18	48
123		7	7	7	9	24	54
124		7	7	7	12	12	45
125		7	7	7	12	14	47
126		7	7	7	12	18	51
127		7	7	7	14	14	49
128		7	7	7	14	18	53
129		7	7	9	9	9	41
130		7	7	9	9	12	44
131		7	7	9	9	14	46
132		7	7	9	9	18	50
133		7	7	9	12	12	47
134		7	7	9	12	14	49
135		7	7	9	12	18	53
136		7	7	9	14	14	51
137		7	7	12	12	12	50
138		7	7	12	12	14	52
139		7	7	12	14	14	54
140		7	9	9	9	9	43
141		7	9	9	9	12	46
142		7	9	9	9	14	48
143		7	9	9	9	18	52
144		7	9	9	12	12	49
145		7	9	9	12	14	51
146		7	9	9	14	14	53
147		7	9	12	12	12	52
148		7	9	12	12	14	54
149		9	9	9	9	9	45
150		9	9	9	9	12	48
151		9	9	9	9	14	50
152		9	9	9	9	18	54
153		9	9	9	12	12	51
154		9	9	9	12	14	53
155		9	9	12	12	12	54



# FUJITSU - COMMUNITY

## SPORTING CHANCE

Fujitsu General Australia is extremely proud to be a major sponsor of the Sporting Chance Cancer Foundation.

Established in 1996 by a number of high profile Australian sports men and women, including Fujitsu Generals' longstanding ambassador Mark Taylor, Sporting Chance is a not-for-profit organisation that helps provide home support and care to children with cancer.

To date, Fujitsu General has donated more than \$8.4M to this worthy cause, with a percentage of sales from Fujitsu's air conditioning units going towards the funding of outreach programs and exploring better ways to treat and overcome cancer.

This support has enabled the Sporting Chance Cancer Foundation to fund nurses across Australia allowing children to receive improved cancer care closer to home. This funding also allows for remote treatment and care for families, and considerably reduces the time spent travelling to and from the nearest hospital, which could be thousands of kilometres from home.

Sporting Chance initiatives allow families to spend more quality time at home together, while still having access to the appropriate care for their child.

Fujitsu General is dedicated to the ongoing support of the Sporting Chance Cancer Foundation and its commitment to improving the cancer care available for children, as well as research and new treatment developments.





# FUJITSU

AUSTRALIA'S FAVOURITE AIR®



If you are looking for an air conditioner that you can trust to keep you comfortable all year round, my advice is to look no further than a Fujitsu.

They are efficient, effective, and beautifully designed, I should know, I bought one myself.

So for an air conditioner you can trust, go with the name you know, **Fujitsu, It's Australia's Favourite Air®.**



*Mark Taylor*



FUJITSU GENERAL AUSTRALIA

ABN 55 001 229 554 • A SUBSIDIARY OF FUJITSU GENERAL LIMITED

[fujitsugeneral.com.au](http://fujitsugeneral.com.au)

email: [contact@fujitsugeneral.com.au](mailto:contact@fujitsugeneral.com.au)

Ph: 1300 882 201

Proud supporters of:



For every air conditioner sold, a donation is made to the Sporting Chance Cancer Foundation.

FGAMS09/19